


KRT E 100-251

1750 rpm


4 inch



TDH

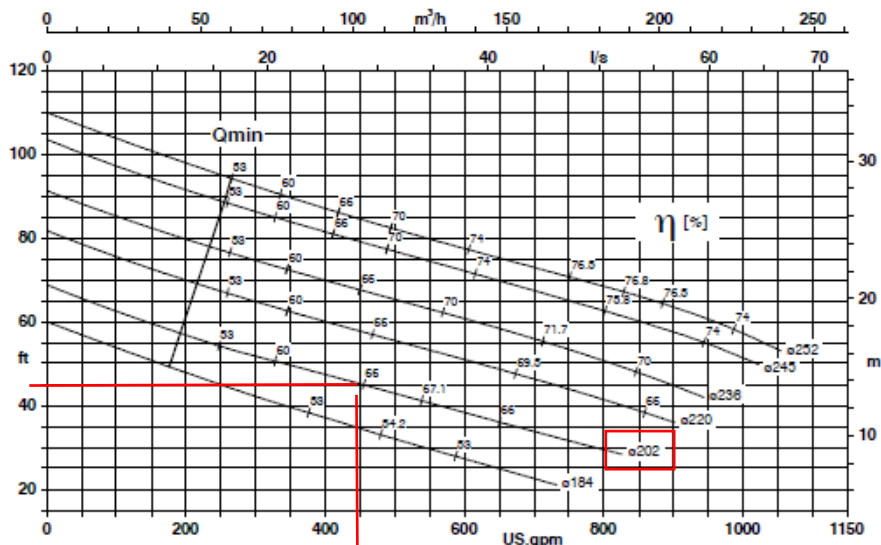

Power Input

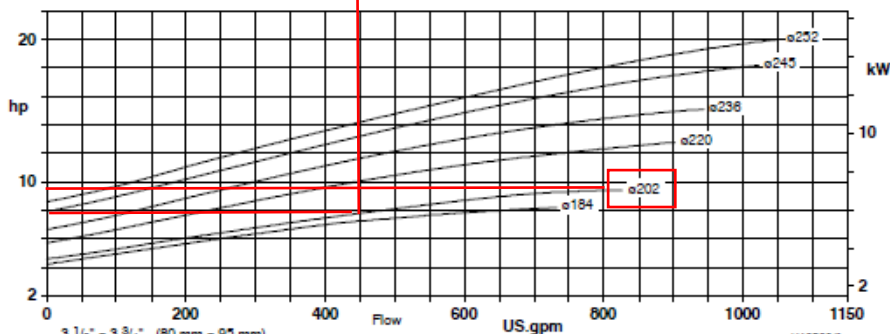

Free passage

3 1/8" - 3 3/4" (80 mm - 93 mm)

K42580/1

MOTOR RATING Material G		MAX. LIQUID TEMP.		MOTOR CODE
Hp	kW	°F	°C	
7.5	5.6	104	40	54UK IE3
				54XK IE3*)
		140	60	54U
				54X *)
10	7.5	104	40	74W
				74Z *)
		140	60	74UK IE3
				74XK IE3*)
10	7.5	104	40	74U
				74X *)
		140	60	114W
				114Z *)

MOTOR RATING Material G		MAX. LIQUID TEMP.		MOTOR CODE
Hp	kW	°F	°C	
15	11.2	104	40	114U
				114X *)
		140	60	164W
				164Z *)
20	14.9	104	40	164U
				164X *)
		140	60	214W
				214Z *)
25	18.6	104	40	194U
				194X *)
		140	60	214U
				214X *)

*) FM/CSA = Explosionproof to Class I, Division 1, Groups C & D

New: Motor versions UK, XK for wet and dry installation with energy-saving motors (Classification: NEMA MG1 "Energy Efficient Motors").