



460V
 FLA 15.5
 S6L1000M4-6
 1150 RPM
 6" Dischg
 11" Imp



Performance Curve

S6L/S6LX

RPM: **1150**
Discharge: **6"**
Solids: **3-1/4"**

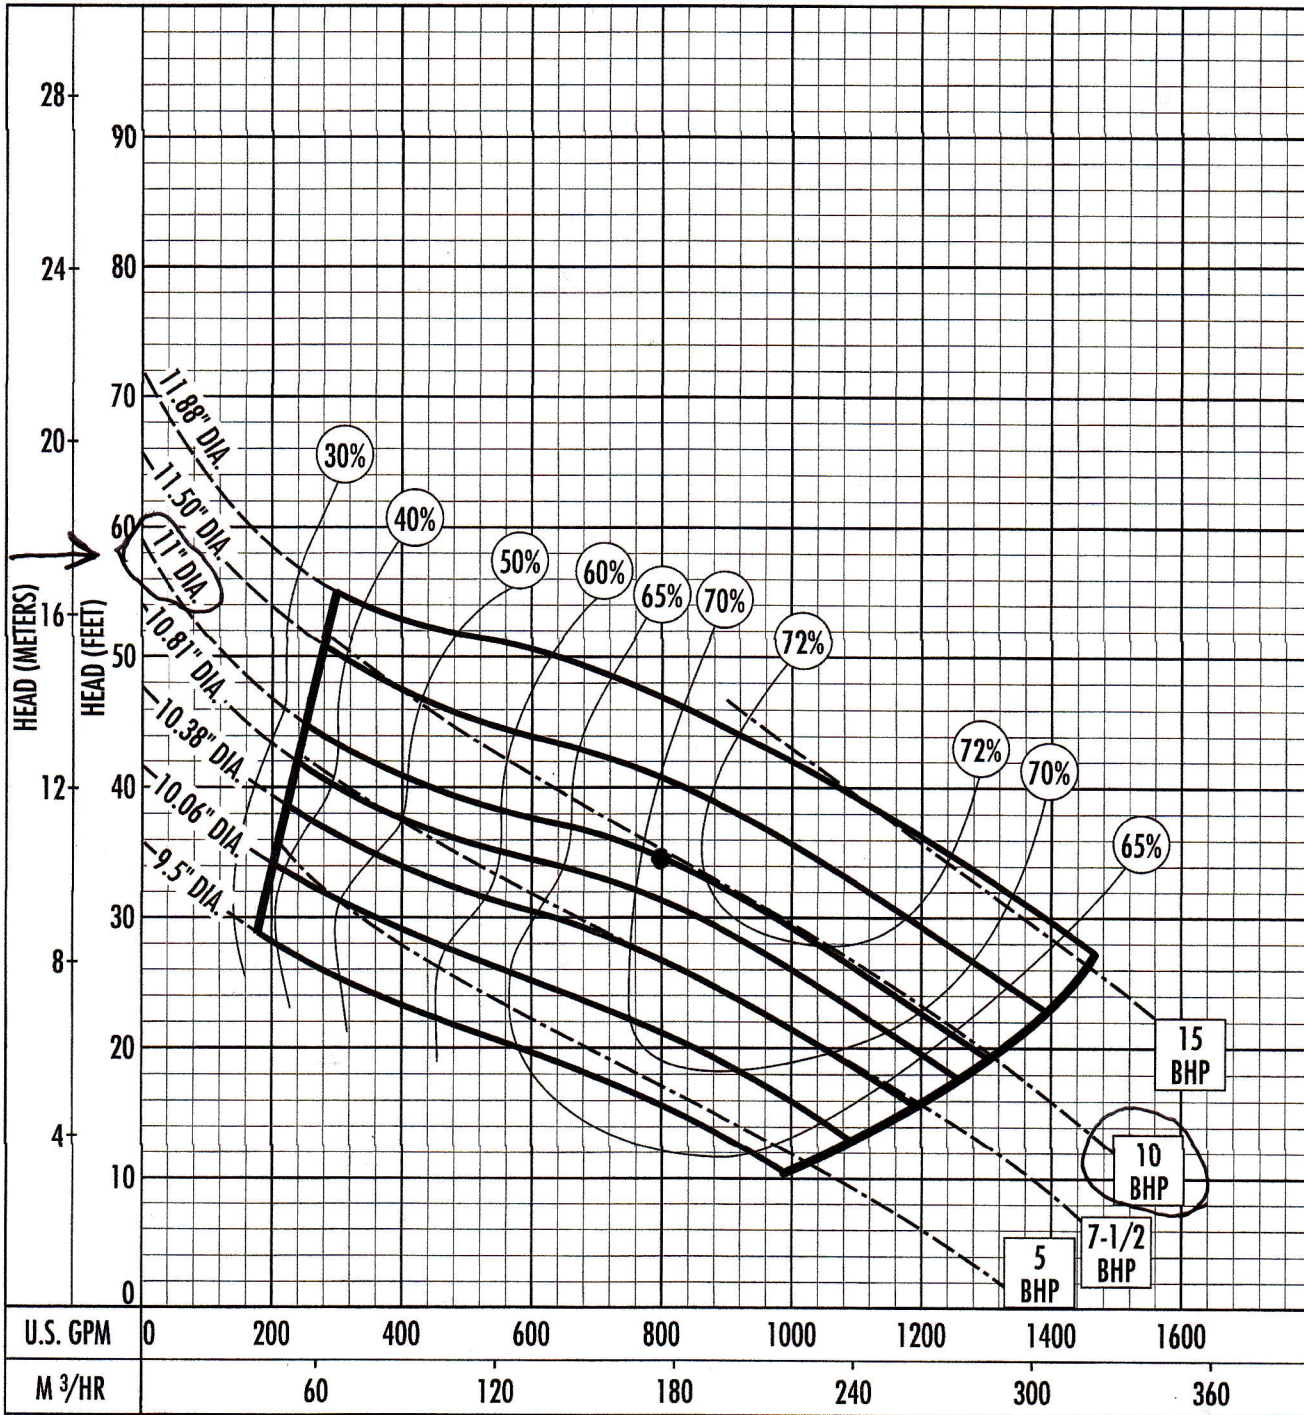

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.