


KRT K 100-251 / ...

1750 rpm

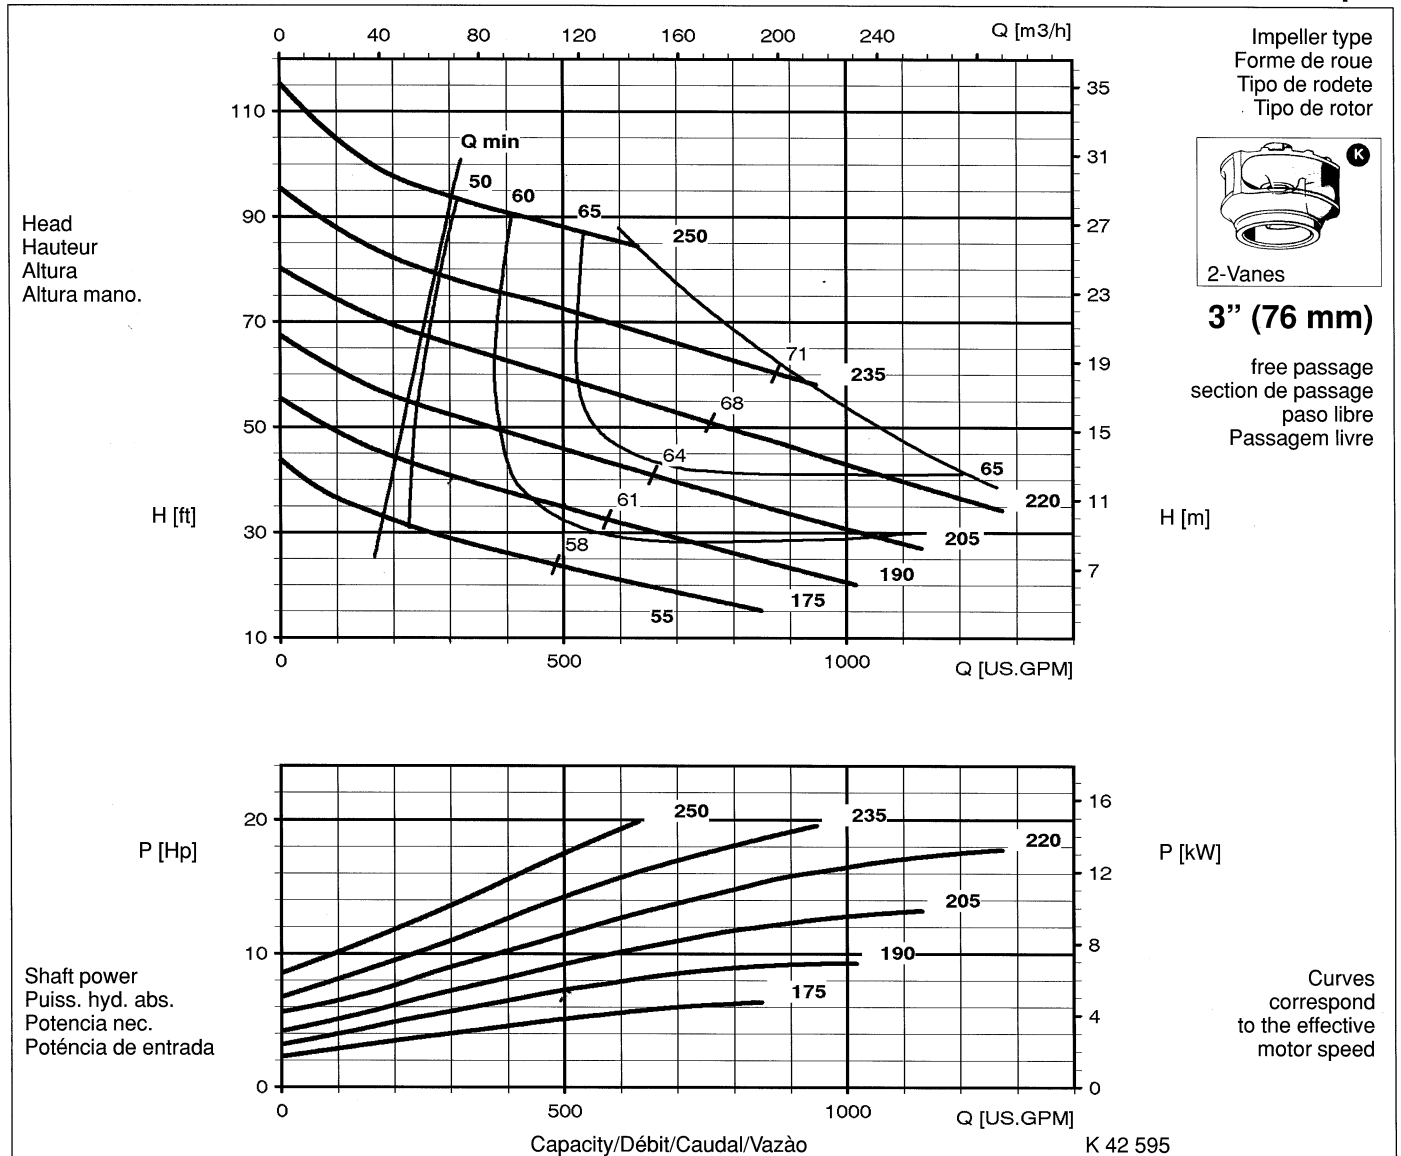

Suitable motor sizes/Définition taille moteur/Tamaños de motor aplicables/TamANHOS apropriados de motores

MOTOR RATING Material		MAX. LIQUID TEMP. °F (°C)	MOTOR CODE
G/G1/GH/H Hp (kW)	C1/C2 Hp (kW)		
7.5 (5.5)	7.5 (5.5)	104 (40)	5 4 U 5 4 X (FM)
		140 (60)	7 4 W 7 4 Z (FM)
10 (7.5)	10 (7.5)	104 (40)	7 4 U 7 4 X (FM)
		140 (60)	11 4 W 11 4 Z (FM)

MOTOR RATING Material		MAX. LIQUID TEMP. °F (°C)	MOTOR CODE
G/G1/GH/H Hp (kW)	C1/C2 Hp (kW)		
15 (11.5)	15 (11.5)	104 (40)	11 4 U 11 4 X (FM)
		140 (60)	16 4 W 16 4 Z (FM)
20 (16)	20 (16)	104 (40)	16 4 U 16 4 X (FM)

(FM) = Explosionproof to Class I, Division 1, Groups C & D
(Explosionproof according to IEC 79 (EEx d II B) on request).