


KRT K 150-401 / ...

1160 rpm

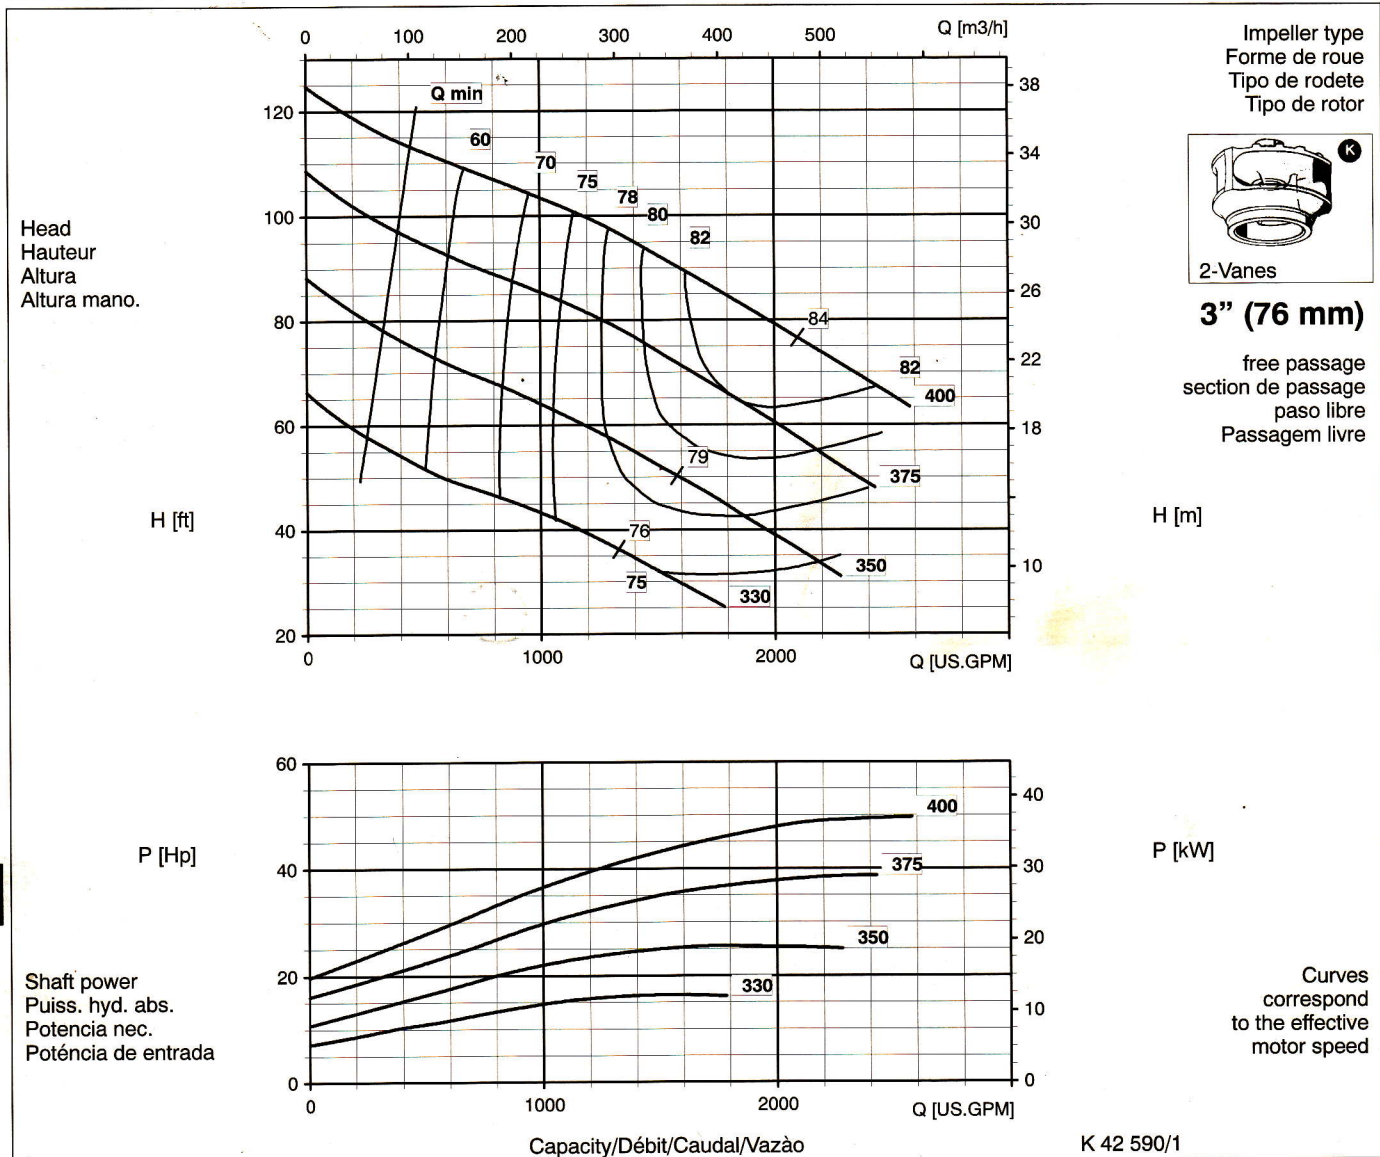

Suitable motor sizes/Définition taille moteur/Tamaños de motor aplicables/Tamanhos apropriados de motores

MOTOR RATING Material G Hp (kW)	MAX. LIQUID TEMP. °F (°C)	MOTOR CODE	MOTOR RATING Material G Hp (kW)	MAX. LIQUID TEMP. °F (°C)	MOTOR CODE
24 (18)	104 (40)	20 6 U 20 6 X (FM)	40 (30)	104 (40)	32 6 U 32 6 X (FM)
	140 (60)	26 6 W 26 6 Z (FM)		140 (60)	40 6 W 40 6 Z (FM)
32 (24)	104 (40)	26 6 U 26 6 X (FM)	50 (38)	104 (40)	40 6 U 40 6 X (FM)
	140 (60)	32 6 W 32 6 Z (FM)		140 (60)	50 6 W 50 6 Z (FM)

(FM) = Explosionproof to Class I, Division 1, Groups C & D
(Explosionproof according to IEC 79 (EEx d II B) on request).