


KRT F 80-200 / ...

1750 rpm

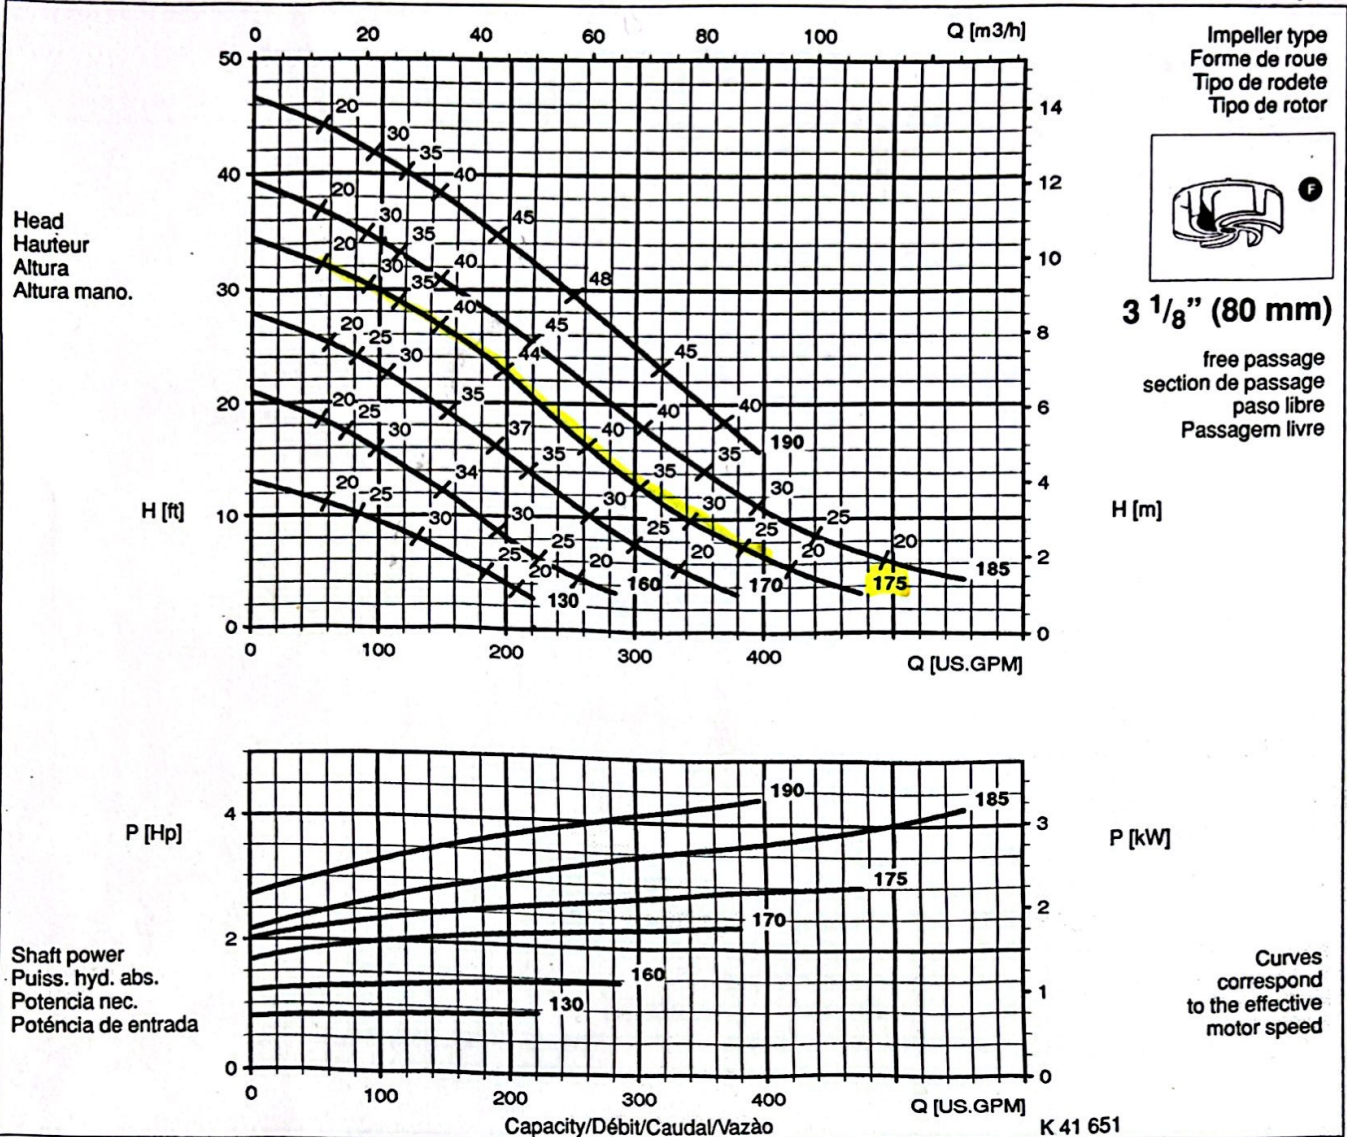

Suitable motor sizes/Définition taille moteur/Tamaños de motor aplicables/Tamanhos apropriados de motores

MOTOR RATING Material G Hp (kW)	MAX. LIQUID TEMP. °F (°C)	MOTOR CODE
1.1 (0.8)	104 (40)	1 4 U2G 1 4 X2G (FM)
	140 (60)	1 4 W2G
1.75 (1.3)	104 (40)	1 4 U2G 1 4 X2G (FM)
	140 (60)	2 4 UG 2 4 XG (FM)
2.4 (1.8)	104 (40)	2 4 UG 2 4 XG (FM)
	140 (60)	2 4 WG

MOTOR RATING Material G Hp (kW)	MAX. LIQUID TEMP. °F (°C)	MOTOR CODE
3.4 (2.5)	104 (40)	2 4 UG 2 4 XG (FM)
	140 (60)	3 4 WG
5.0 (3.7)	104 (40)	3 4 UG 3 4 XG (FM)

(FM) = Explosionproof to Class I, Division 1, Groups C & D  
(Explosionproof according to IEC 79 (Ex d II B) on request).