
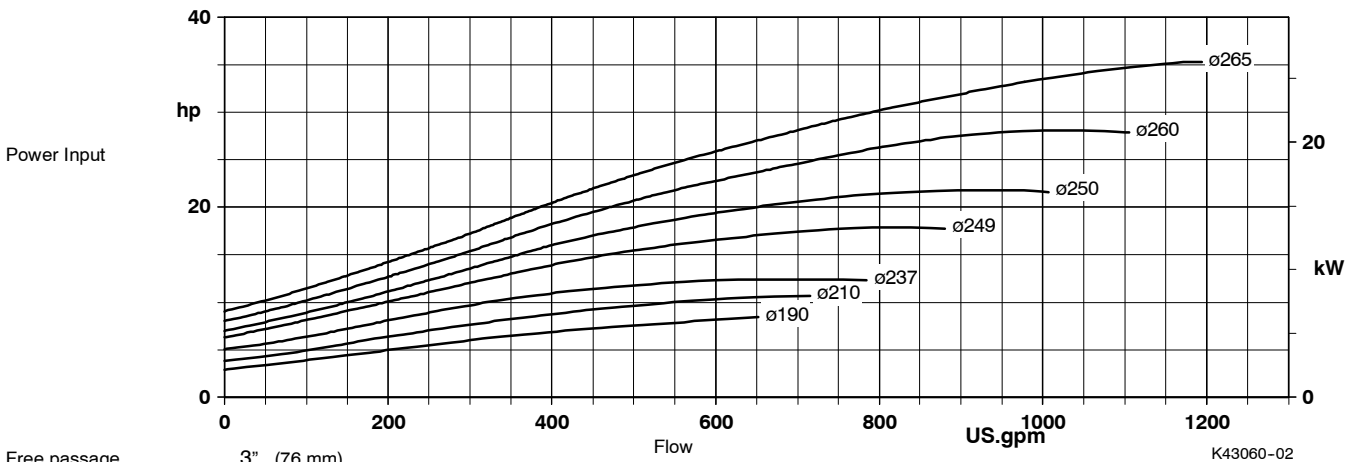
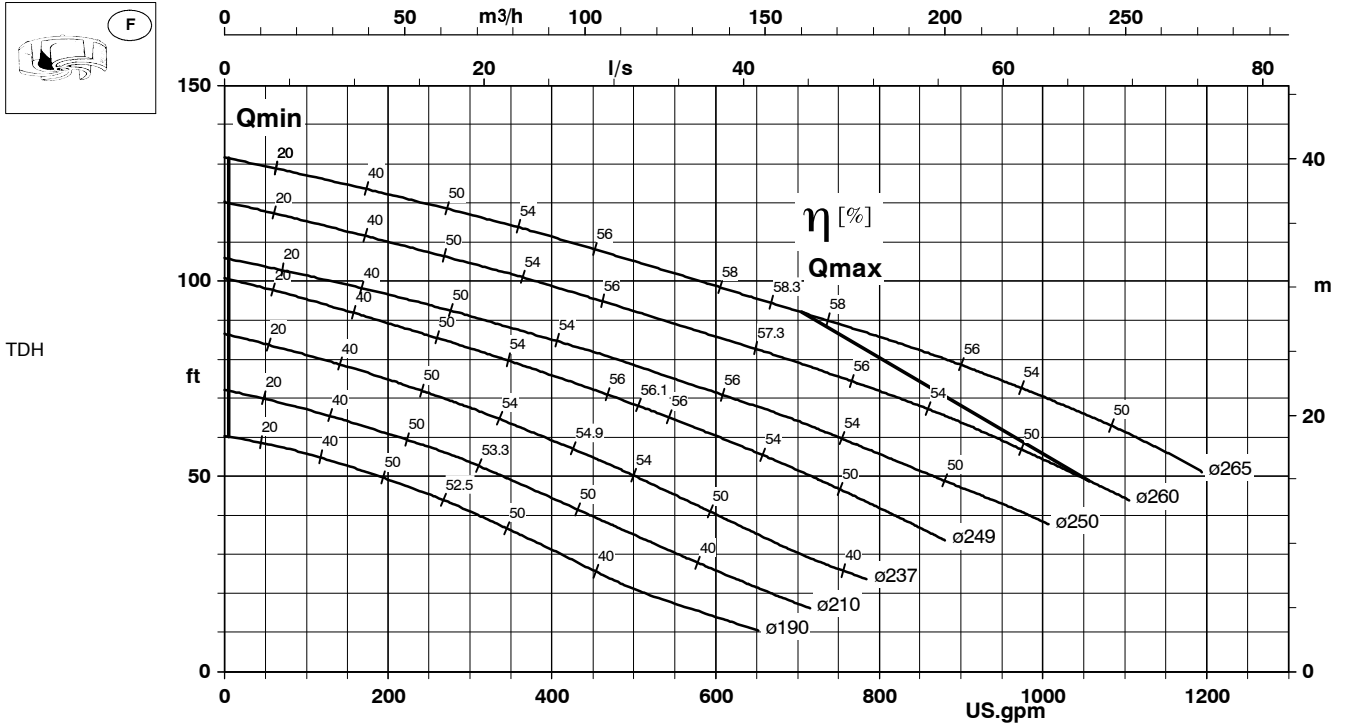


KRT F 80-250

1750 rpm

3 inch



Free passage

3" (76 mm)

Flow

K43060-02

MOTOR RATING				MAX. LIQUID TEMP.		MOTOR CODE
Material				°F	°C	
G, G1, G2, GH, H	C1, C2	Hp	kW			°F
7.5	5.6	7.5	5.6	104	40	54UK IE3
						54XK IE3 *)
						54U
						54X *)
10	7.5	10	7.5	104	40	74W
						74Z *)
						74UK IE3
						74XK IE3 *)
10	7.5	10	7.5	140	60	74U
						74X *)
						114W
						114Z *)

MOTOR RATING				MAX. LIQUID TEMP.		MOTOR CODE
Material				°F	°C	
G, G1, G2, GH, H	C1, C2	Hp	kW			°F
15	11.2	15	11.2	104	40	114U
						114X *)
						164W
						164Z *)
20	14.9	20	14.9	104	40	164U
						164X *)
						214W
						214Z *)
25	18.6	-	-	104	40	194U
						194X *)
30	22.3	25	18.6	104	40	214U
						214X *)

*) FM/CSA = Explosionproof to Class I, Division 1, Groups C & D

New: Motor versions UK, XK for wet and dry installation with energy-saving motors (Classification: NEMA MG1 "Energy Efficient Motors").